

Floating Storage Regasification Units (FSRU)

Author: Carlo Carniani – Senior Petroleum Engineer

LNG BASIC CONCEPTS

Natural gas is today a primary energy source, which will drive the transition from a fossil fuel-based to a renewable energy-based world.

In the past, oil companies drilled primarily for oil: they often had to reinject or flare the associated gas; on the other hand, a gas discovery was often considered not commercially valuable.

Later on, flaring was prohibited by producing countries, in a first instance for the sole purpose of saving mineral resources; more recently, reduction of greenhouse gases emissions became an important additional reason for avoiding flaring as much as possible.

On the other hand, gas turbine technology progress lead, in the '60s, to the manufacture of reliable equipment providing a large energy output. Such high efficiency gas turbines, generally known as combined cycle gas turbines (CCGT), made possible the realization of large size power generation units, opening the way for the extensive use of gas in power plants. The CCGT technology operates with a combination of Brayton and Rankine thermodynamic cycles and may reach a thermal efficiency of 64%, which is definitely a remarkable figure.

The occurrence of large natural gas reserves in remote locations and cost-effective ways of producing power from gas prompted companies to search for an alternative use for gas and liquefied natural gas (LNG) projects were conceived and evaluated. The balance between oil price (increasing) and

production costs (decreasing) resulted in a progressively better economical feasibility for LNG initiatives. In addition to this, the search of secure and clean (compared to oil and coal) energy sources lead several countries to incentive the use of LNG. A typical example was the decision of UK to eliminate smog from urban areas, which was directly responsible for about 4,000 deaths per year, then switching to gas as the primary fuel for urban heating.


At the time this paper is written, geopolitical factors are increasingly pushing toward a very desirable energy independence for Europe. In this respect, LNG and natural gas supply from North Africa, Middle East and former Soviet Union countries are crucial for the EU energy balance. The former is the most flexible source among those available; EU countries are now expanding their capacity to import LNG from abroad.

Projects were undertaken on a case-by-case basis: buyers and sellers cooperated strictly on every aspect of the LNG value chain— production, liquefaction, transportation, and regasification. After the first deliveries in the '60s, LNG facilities grew progressively and became a significant global energy infrastructure in the present century, capable of providing a supply of 370 million tonnes of LNG per year.

LNG had a share of about 12% of the world gas production, according to IEA 2020 data. In the course of 2022 the global LNG trade increased by about 5% in the world, and the trend is expected to grow further as a result of Europe's shift to massive LNG supply, as a consequence of the Russia-Ukraine conflict, and expected China's increased energy demand.

EU is already the main LNG importer through 17 active terminals: at the end of 2022 second quarter, the amount of LNG was over 65 BCM, corresponding to a value exceeding 60 billions EUR. USA provided almost 50% of the total LNG imported by EU. The import capacity is presently 157 BCM of equivalent dry gas, that is, about 40% of the total gas

demand. France, Spain and Belgium have been, in the order, the largest LNG importing countries so far.

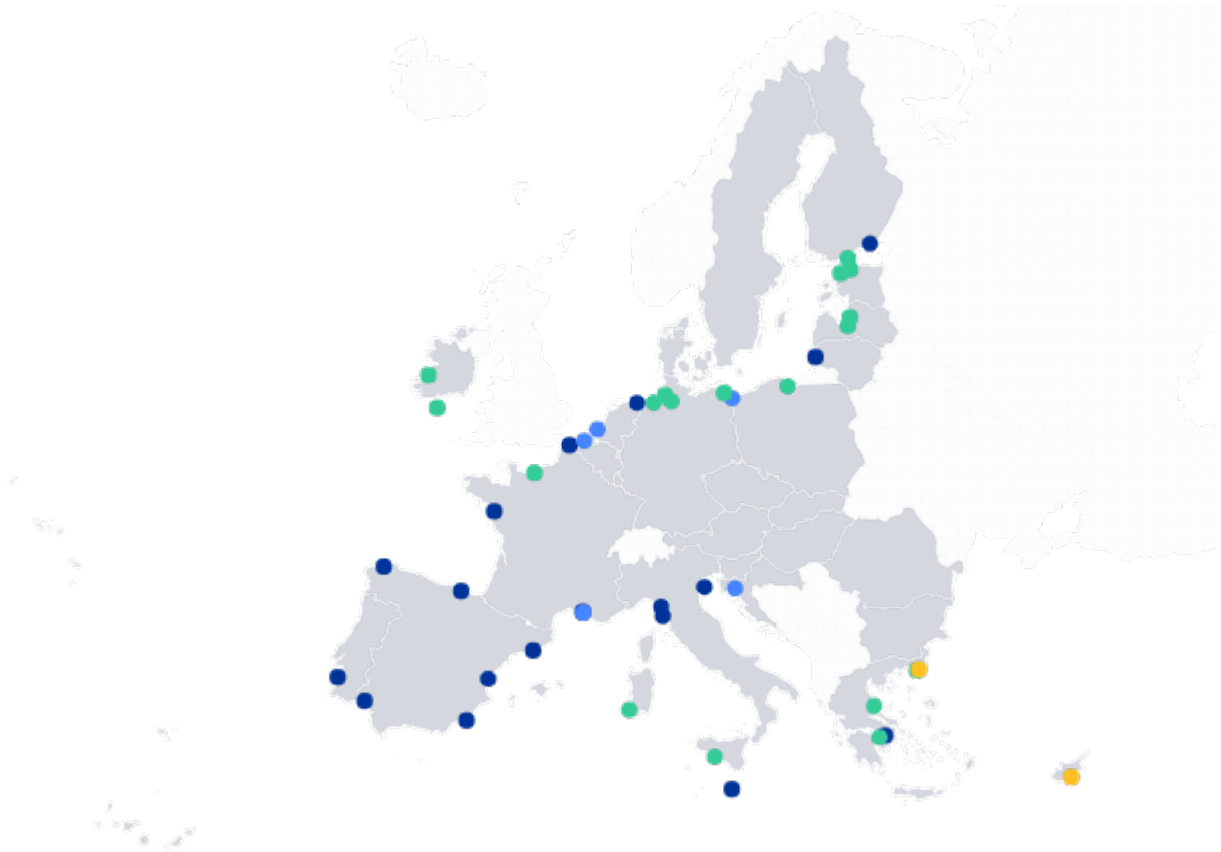

LNG Terminals in EU: operational (blue) under construction (yellow) planned (green)

TECHNICAL OUTLOOK

In simple terms, the LNG cycle consists in the following steps:

- identifying large reserves of natural gas with little or no chance of use in local markets,
- building a facility for liquefying the natural gas at very low temperatures (-163°C); this is because, in its liquid form, natural gas shrinks to less than 1/600th of its gaseous volume, making its transportation and storage possible over long distances.
- shipping the LNG in specially designed tankers to markets
- storing and regasifying LNG before injecting it into a

pipeline grid.

At this point LNG becomes indistinguishable from pipeline gas for the end user. Floating regasification vessels come into play in the last step.

Approximately 8 to 10% of the energy in natural gas is consumed in the LNG liquefaction process and during LNG transport (LNG tankers use LNG as propulsive fuel). In a typical LNG liquefaction plant, it takes about 230 kW to liquefy one MMscfd of natural gas.

LIQUEFACTION PROCESS: TECHNOLOGY OVERVIEW

Natural gas purification and pre-treatment.

The natural gas feeding a liquefaction facility contains, in general, several contaminants that must be reduced to levels which meet:

- satisfactory liquefaction plant performance
- LNG sales specifications.

The level of each contaminant depends on the fluid properties and composition which are specific of each gas reservoir.

A typical pre-treatment process consists of the following steps.

First, any hydrocarbon condensates present in the natural gas stream have to be separated. Such liquids are generally used as plant fuel, or resold.

Acid gas components (CO_2 , H_2S) removal is then performed. CO_2 levels must be contained within 50 parts per million (ppm), to avoid freezing in the main cryogenic exchanger. H_2S content, instead, must be less than 3 ppm, to meet system integrity and

sales gas specifications.

The removal of acid gases is accomplished by amine-based absorption processes. It is possible that amine- H_2S reaction products have to be converted to elemental sulphur via a dedicated recovery unit (Claus process, catalytic oxydization), when the amount of H_2S produced is relevant.

Feed gas undergoing acid components removal is bubbled through aqueous solutions; therefore, it exits the process train being saturated with water vapor, which has to be removed in order to avoid ice formation in the liquefaction exchanger.

Dehydration can be performed in a number of ways. A standard approach is absorption on glycol, which can be regenerated by distillation and used in a cycle.

An alternative dehydration scheme is achieved by cooling the gas with a heat exchanger fed with a proper pre-cooling fluid (air, water or other suitable fluid available), therefore condensing the major part of the water, while the rest is conveniently removed with molecular sieves that, thanks to the use of high surface area zeolites, may retain additional water till reaching levels below 0.1 ppm.

In certain cases, natural gas contains mercury, which must be removed at levels below 1 ppb. This is because mercury causes embrittlement of aluminium vessels and heat exchanger equipment, with potentially disastrous consequences, like those of the Skikda LNG plant accident occurred in 2004.

Effective mercury removal is accomplished by adsorption on a bed of molecular sieves or activated carbon; the latter can be impregnated with sulfur or halides, which form very stable solid compounds with mercury. The molecular sieves can also be regenerated, while the activated carbon beds cannot.

The final step in gas pre-treatment is the removal of those hydrocarbons which have a melting point higher or close to the

methane boiling point, in order to prevent any solid formation by freezing in the cryogenic exchanger. In practice, the gas undergoes a series of distillations in columns designed to separate hydrocarbon fractions according to their increasing boiling point: therefore, there is a de-ethanizer column, followed by a de-propanizer and a de-butanizer columns. In this way, ethane, propane, butane and aromatics can be removed from gas and used for several purposes: cooling fluid makeup, plant fuel or sold as NGL (natural gas liquids) products.

▪ ***Liquefaction processes.*** The natural gas liquefaction process consists, basically, in chilling the gas stream till it reaches the temperature of -163°C . This goal is achieved using a series of heat exchangers, where the gas is cooled down by a fluid that has been chilled down by expansion. The cool-down process is performed stepwise, using one or more working fluids. As it may be expected, such a process can be achieved in different ways, so several proprietary processes are marketed today for large-scale baseload natural gas liquefaction plants. These processes fall into the following broad categories:

- Pure-refrigerant cascade process, the basic one, where a single working fluid is used
- Mixed-refrigerant processes: in this case, a mixture of working fluids is used (e.g., propane and ethane) whose relative proportions can be adjusted to optimize the thermal efficiency in response to large external temperature variations.
- Nitrogen expander-based processes. This class of processes is often used in offshore facilities, because of the smaller footprint and the use of a not-inflammable working fluid, such as nitrogen.
- Propane-precooled mixed-refrigerant, with back-end nitrogen expander cycle. In this case, the

refrigerant mixture is first cooled down using propane as working fluid, so that it can bring the feed gas close to the desired temperature; further cooling using nitrogen completes the process.

- ***Regasification Typologies.*** There are two main concepts for offshore LNG terminals: Gravity Base Structures (GBS), and Floating Storage and Regasification Units (FSRU). The design selection depends on site conditions (e.g. water depth, subsea soil characteristics, marine conditions) and sendout capacities (Kulish et al., 2005). A GBS is a fixed concrete structure laying on the sea floor, where LNG storage tanks and regasification equipment are placed. The first GBS-based regasification facility in the world was the Adriatic LNG terminal (ALT), Northern Adriatic Sea, Italy. The concrete structure set down in 30 m of water and includes two LNG storage tanks, the regasification plant, mooring and unloading facilities for LNG carrier ships. The ALT dimensions are 47 meters height, 88 meters width, and 180 meters length, which compare closely to the dimensions of a large FSRU ship. Actually, a FSRU is a LNG ship that can either be a specific design or a modification of an existing LNG carrier to include the regasification facility. Being intrinsically floating structures, they can either moored to the seabed via a turret mooring system or tethered to a jetty in a port area.

- ***Regasification Processes.*** The regasification process relies on the presence of certain units designed to perform specific operations. The first operation in the regasification process is the transfer of LNG from the carrier to terminal or FSRU and is performed via LNG

arms.



The design is different in the case of an onshore terminal with respect to a FSRU. In the former case, each arm consists of a riser pipe, inboard and outboard arm. The diameter of the arm varies between 16 and 24 in. Typically, an LNG swivel joint is installed between each pipe segment to accommodate the changing positions between the onshore and the ship components. Emergency release systems, quick connect/disconnect coupling (QCDC), and position monitoring systems are provided to ensure safe operation of the arms. A nitrogen purge is also provided for each arm for draining the content prior to disconnection from the ship. The flow rate capacity of a loading arm varies between 4,000 and 6,000 m³/hr. The typical configuration of the loading arm battery consists in two or three liquid loading arms, a vapor return arm, and a common spare arm for both liquid or vapor, depending on the operational needs.

In the case of a FSRU, flexible cryogenic hoses are used for LNG transfer. Flexible hose present several advantages: it is worth to mention the possibility of connecting the LNG tanker and FSRU in both side by side and tandem configuration, or the possibility of operating in shallow water.



Composite LNG hoses typically consist of multiple polymeric films making a fluid-tight barrier to the LNG and woven fabric layers, providing mechanical strength, which are encapsulated between two stainless steel wire helices.

LNG pumping is generally achieved through submerged electric motor pump. The pump assembly along with electrical cables safely submerged in the dielectric liquid, avoiding the need of penetrating the tank and subsequent mechanical seals. Typically, a low pressure pump (LP sendout) is designed to discharge at about 10 barg pressure in order to minimize boiled off gas (BOG) effect, which will be addressed later on in this section. The high pressure (HP sendout) pumps take suction from the BOG recondenser typically at about 8 barg pressure and increase the pressure to meet the sendout pressure requirements, whose range is 80 to 120 barg. Heat generated by the motor is mostly removed by the inlet LNG, a small portion of which is vaporized, vented from the pump casing and sent to the BOG recondenser.

The BOG condenser, the HP sendout pumps and the respective pipes constitutes a critical system for regasification operations, since pressure and fluid volumes may vary remarkably, which may be a challenge for continuous operations, so that equipment sizing has to be accurately engineered.

- ***Boil-off gas recondenser system.*** LNG vapors flow during ship unloading occurs because of heat exchanged by unloading pumps, unloading lines, heat leak to the storage tanks and volume displaced from the tank by the unloaded liquid. These vapors must be compressed, removed, and condensed in the BOG recondenser to maintain the storage tank at a low pressure. A portion of the vapor is returned to the ship, and the majority is recondensed in the BOG recondenser. During the holding operation, when the ship is not at port, vapor flow is significantly lower. BOG is generated mainly due to heat leak to the storage tanks, typically 0.05 volume % per day. When the plant operates at high sendout, the BOG flow is further reduced and can become negative such that makeup vapor from the natural gas sendout system may be required. Typically, the vapor rate varies from 0.1 to 1 MCM between holding and ship unloading operations. These vapor flows are compressed by the BOG compressor and recovered in the BOG recondenser. Finally, BOG recondenser serves also as a pressure and liquid volume buffer for the HP sendout pump, allowing its smooth operation.



Boil-Off Gas Recondenser System

Another key element in the regasification process is the vaporizing system. The principle of the vaporizer is warming up the LNG via a heat exchange device where a suitable working fluid at higher temperature than LNG itself. Although several types of vaporizers are available, most the existing plants use either the Open Rack Vaporizer (ORV) or the Submerged Combustion Vaporizer (SCV), the former covering almost 70% of applications.

An open rack vaporizer (ORV) is a heat exchanger with water as heating working fluid. These units generally are constructed from finned aluminium alloy tubes, properly protected by corrosion and arranged in panels. In most instances, the source of water is just the sea. This is obviously a natural choice for FSRU systems, with the notable exception of operation in very cold climates, where freezing issues may occur. In those instances, an hydrocarbon working fluid is

introduced, that exchanges heat with water and release it to LNG at temperatures where water would freeze.



Open Rack Vaporizer Installation on FSRU

FLOATING STORAGE REGASIFICATION UNITS

A Floating Regasification and Storage Unit (FSRU) is basically a special kind of ship. In particular, it is a Liquefied Natural Gas (LNG) storage ship provided with an onboard regasification plant capable of returning LNG back into a gaseous state and then supplying it directly into the gas network. FSRU ships vary in size: from 150 m long Karunia Dewata barge-like ship (25,000 m³ storage capacity) to 346 m long Challenger (storage capacity 263,000 m³). FSRUs and LNG ships have four to six separate heavily insulated cargo tanks inside their hull. There are two cargo tank designs commonly in use: Membrane tanks are box shaped so that the ship has a flat deck similar to ordinary tankers, which helps the

installation of regasification equipment.



FSRU equipped with membrane tanks

The other design is known as 'Moss tanks' that are spherical, giving LNG tankers their unmistakable appearance.



LNG tanker with Moss tanks

storing LNG at a temperature of -161°C in cryogenic storage tanks. The cold temperature keeps the LNG cargo in its liquid state until it is required for the gas network. LNG is generally stored and transported in bulk storage tanks at slightly above atmospheric pressure; usually less than 150 kPa (mbar) above. LNG conversion to gas is performed using seawater, which flows in the shell of vaporizer ('tube and shell' heat exchanger) while LNG passes through tubes.

Seawater at the outlet of the vaporizer is about 7°C colder than at the inlet; outlet water is then blended back to ambient temperature. A FSRU typically discharges gas into the network at a pressure of around 60-80 Bar and a temperature of 5°C. Working at full capacity, a 170,000 m³ load would be regasified in about six days.

The FSRU concept has the great advantage of avoiding the impact of building large infrastructure onshore. As the FSRU is a real operating ship, when the project is over, the ship simply sails away with no redundant infrastructure left behind. FSRUs are also convenient for peak-shaving gas delivery to manage gas supply through high and low demand periods such as winter peak demand requirements. It is also possible for a FSRU to store gas on board until it is required or send it to available onshore storage facilities, so that more LNG can be imported to the FSRU. FSRUs are usually permanently moored at a jetty, (single berth) but other configuration are possible.

In single berth configuration, the tanker and the FSRU moor alongside the FSRU and offload LNG for regasification and then supply directly into a pipeline. This low-cost option works best in protected harbors or near-shore with water depths of 15-30m and mild weather conditions.



Single Berth Mooring

There are numerous Single Point mooring options, which include mooring towers, yokes or turrets.



Cross-dock Mooring FSRUs

Segregated berths for LNG ships and FSRUs are a very flexible solution from the marine point of view, since berths can be connected in series to accommodate more FSRU, while keeping the infrastructure light.



Single Point Mooring

ECONOMICAL ASPECTS

For several years FSRUs remained a relatively niche opportunity in the energy business. Starting from early 2000, there has been a significant lift in deployment of the technology as costs and capability have been optimised and FSRU units are being used to access new markets.

The global FSRU fleet currently consists of approximately 48 vessels, with processing capabilities ranging from 2 to 6 MTPA of LNG.

Modern FSRUs provide the quite same full processing capability as land based terminals including full boil-off gas management facilities, and this is a key factor in the economics of a LNG project.

Actually, there are three key reasons supporting investment in FSRUs: compared to onshore terminals

- Lower capital cost: the cost of a new FSRU (about 350 M USD) is half that of a terminal; on the other hand, OPEX are higher for a FSRU compared to the onshore

installation

- shorter lead time: A brand new FSRU can be completed in less than 3 years; conversion from a LNG tanker may take 1,5 years. Actually, the lead time is often imposed by the infrastructure onshore (jetty, piping, storage tanks, etc). Of course, if an existing FSRU is chartered, lead time is measured in months
- greater flexibility: FSRU can be used as either a floating regas terminal (with storage), a floating storage unit or as a conventional LNG vessel, making possible to take advantage of favourable market opportunities. Moreover, FSRU can provide an early gas option prior to a decision to build a permanent onshore terminal. There is also the possibility to take back and re-use the FSRU infrastructure at relatively low cost which reduces risk around stranded regas assets. Combined FSRU/power combinations (FSRU tethered to a barge with gas-fired generators) offer opportunities in emerging markets.

ENVIRONMENTAL PERSPECTIVES

FSRUs possess several features which make them attractive from the environment point of view. Environmental considerations play a crucial role in the development and operation of Floating Storage and Regasification Units (FSRUs). As the world seeks to transition to a more sustainable energy future, FSRUs offer certain environmental advantages over traditional LNG import terminals. Here are key points to expand upon:

- Reduced Emissions: FSRUs contribute to the reduction of greenhouse gas emissions compared to other fossil fuels. Natural gas, when used as a cleaner energy alternative, emits lower levels of carbon dioxide (CO₂), nitrogen oxides (NO_x), and sulfur oxides (SO_x) during combustion. By facilitating the importation and distribution of LNG,

FSRUs enable access to cleaner energy sources and help mitigate climate change. Moreover, FSRUs (and LNG tankers) are powered by the LNG stored onboard: a LNG ship will only be carrying relatively small quantities of non-LNG fuels to power non-propulsion systems, which reduces the possibility and the extent of fuel spills.

- **Utilization of Boil-Off Gas:** FSRUs efficiently utilize boil-off gas (BOG), which is the natural evaporation of LNG during storage. Instead of venting the BOG into the atmosphere, FSRUs capture and utilize it as a valuable fuel source. The BOG can be re-gasified and used for onboard power generation, reducing the need for additional fuel consumption and minimizing emissions.
- **Advanced Emission Control Technologies:** FSRUs are equipped with advanced emission control technologies to further minimize their environmental impact. These technologies include gas combustion units, selective catalytic reduction (SCR) systems, and exhaust gas scrubbers, which help reduce air pollutants and ensure compliance with stringent emission regulations.
- **Environmental Monitoring and Compliance:** FSRUs adhere to rigorous environmental monitoring and compliance protocols. Operators implement measures to monitor and control air emissions, water discharge, and noise levels. Regular monitoring and reporting help ensure compliance with environmental regulations and maintain the integrity of marine ecosystems.
- **Environmental Impact Assessments:** Before the deployment of an FSRU project, thorough environmental impact assessments (EIAs) are conducted. EIAs evaluate the potential environmental effects of the project, including its impact on marine ecosystems, air quality, and local communities. These assessments help identify mitigation measures to minimize any adverse environmental effects.
- **Collaboration with Stakeholders:** FSRU projects often involve collaboration with various stakeholders,

including government authorities, environmental organizations, and local communities. Engaging stakeholders in the planning and decision-making processes helps address environmental concerns, fosters transparency, and promotes sustainable practices.

- **Research and Development:** Continued research and development efforts are focused on improving the environmental performance of FSRUs. This includes advancements in emission control technologies, enhanced efficiency in regasification processes, and the development of alternative fuel sources for power generation onboard FSRUs.

By incorporating these environmental considerations, FSRUs contribute to a more sustainable and responsible approach to LNG importation, aligning with global efforts to reduce carbon emissions and promote cleaner energy sources.

In addition to the considerations above, it is important to acknowledge that LNG itself is fundamentally chilled methane, clear, colourless and odourless. Any spillage would result in rapid evaporation with substantially no impact on the surrounding environment. On the other hand, methane is known to be a stronger greenhouse gas than CO₂ and any spillage of it should be avoided, although the amount presumably released in a spill would be small compared to the amount of CO₂ released in the atmosphere, which would keep the impact on the global warming at a very low, if not negligible, level. The environmental damage associated with an LNG spill would be confined to fire and freezing impacts near the spill since LNG dissipates completely and leaves no residue (as crude oil does).

By the way, safety considerations prompted the industry to deploy as many as possible prevention systems and procedures to avoid incidents and spillage. The starting point is that natural gas is combustible, so an uncontrolled release of LNG

(although in its liquid state it cannot explode or burn) may pose a serious hazard of explosion or fire. Being LNG extremely cold, this may cause injuries to people or damages to equipment through direct contact. The major risks associated to LNG uncontrolled release that have been identified during a number of safety assessment performed along the years are pool fires, flammable vapour clouds and flameless explosion.

Pool fire is acknowledged to be the most serious hazard LNG release may cause. If LNG spills near an ignition source, the evaporating gas in a combustible gas-air concentration will burn above the LNG pool. The resulting "pool fire" would spread as the LNG pool expanded away from its source and continued evaporating. Such pool fires are intense, hotter and faster spreading than gasoline fires. They cannot be extinguished; their thermal radiation may injure people and damage property a considerable distance from the fire itself.

If LNG spills but does not immediately ignite, the evaporating natural gas will form a vapour cloud that may move away from spill site and eventually be ignited by some source, causing a fire, without explosion, since only the portion of cloud with certain gas/oxygen concentration will burn. In case of LNG spill on water, it could in principle heat up and regasify almost instantly in a "flameless explosion" (also called a "rapid phase transition"). This scenario has been evaluated on the basis of small scale LNG spills (no large scale LNG spill occurred to date), indicating that flameless explosion is likely much less important than the previous two issues.

The safety hazards associated with LNG terminals have been debated for decades., especially after two major disasters occurred in the past.

The first LNG related incident happened to East Ohio gas Co. of Cleveland on 1944. The fire caused the death of 128 people. Another tragic event occurred in 2004 at Algeria's Skikda LNG

terminal, where 78 people died.

In the former case, the probable reason was identified in the carbon steel used to build the storage tank, unsuitable for low temperature service, that resulted in a failure and subsequent spill. In the latter, the most likely cause was a failure induced by mercury not removed from gas which caused the embrittlement of the aluminium-built low temperature separator.


Since then, technology improvements and standards have made LNG facilities much safer. In this respect, the LNG tanker industry claims a good record of relative safety over the last 64 years; since international LNG shipping began in 1959, tankers reportedly have carried over 90,000 LNG cargoes without any serious accident at sea or in port. The LNG marine safety record is due to several factors. A very important one is the double-hulled design of LNG tankers and FSRUs. This design makes them more robust and less prone to accidental spills than single-hulled oil tankers like the Exxon Valdez, responsible for the Alaskan oil spill after grounding in 1989. A second determinant factor is the deployment of up-to-date safety technologies in LNG-carrying ships like radar, global positioning systems, automatic distress systems and beacons to signal. Last but not least, the Emergency Shut-Down (ESD) system monitors the operation parameters, as well as detection systems and interrupts operation as soon as some deviation from normal occurs.

REGASIFICATION STATISTICS

Figures of LNG trade indicate a progressive growth of the sector along the years. Presently, the global LNG trade is worth of 516 BCM as gas equivalent (Statista, Jan 2023), to be compared with the total natural gas trade figure of 4014 BCM of worldwide gas production (IEA, 2020). In the course of 2022 the global LNG supply growth increased by 5%, a relatively small figure if one takes into account the gas crisis induced

by the interruption of gas shipment from Russia. While EU purchased 66 BCM of gas from LNG, the rest of the world reduced its requests with respect to 2021. USA supplied about two thirds of LNG imported by EU.

The number of active Floating Storage and Regasification Units (FSRUs) has been steadily increasing over the years. As of 2021, there were around 30 operational FSRUs worldwide. This number is expected to continue growing as more countries and regions adopt FSRU technology to meet their liquefied natural gas (LNG) import requirements. According to Statista website, FSRU Fleet reached 48 ships in May 2022; 25 out of 48 with storage capacity between 160,000 and 180,000 cubic meters. Other FSRU class may store from 25,000 to 130,000 cubic meters. The following plot shows the trend of FSRU diffusion in the global market

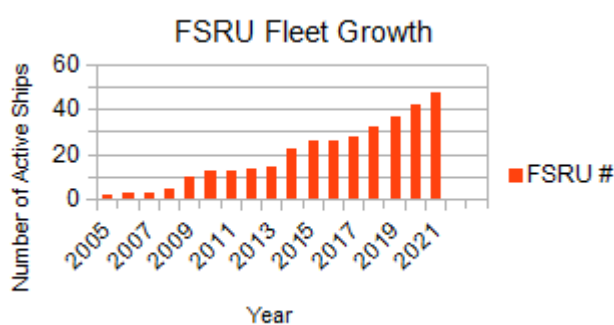

FSRUs have played a significant role in the global LNG supply chain. While precise data on the volume of LNG handled specifically by FSRUs versus onshore terminals is not readily available, FSRUs have demonstrated their ability to handle substantial LNG volumes. They have been employed in various regions, including Europe, Asia, the Americas, and the Middle East, to provide flexible and efficient LNG regasification infrastructure. In terms of regasification capacity, offshore regasification mounts to 116 MTPA, vs. a total capacity of 850 MTPA (source IGU, 2021).

FSRUs have been particularly popular in regions with limited onshore LNG infrastructure or where the demand for natural gas

fluctuates. For example, countries in Southeast Asia, such as Indonesia, Malaysia, and Bangladesh, have embraced FSRUs to quickly establish LNG import capabilities. Europe has also seen significant FSRU deployment, with countries like Greece, Lithuania, and Croatia using FSRUs to enhance their energy diversification and security.

The FSRU sector has witnessed steady growth in the number of projects under development or in the planning stage. Several countries, including those without previous LNG import capabilities, are considering FSRUs as an attractive solution due to their shorter lead times and lower infrastructure costs compared to onshore terminals. This trend indicates a positive outlook for the expansion of the FSRU market in the future.

It's important to consult the latest reports and industry sources to obtain the most up-to-date and accurate statistics on global regasification, including the number of active FSRUs, their locations, and the volume of LNG handled.

The FSRU fleet is still a minor fraction of the total LNG ships fleet, that today counts on 700 vessels worldwide.

CONCLUSIVE REMARKS

The present economic and political conditions have accelerated a trend in LNG use that was already in place, although conditioned by economy fluctuations and limited by the availability of cheap gas from Russian Federation. Today's global context of the energy demand determines, especially in EU, a vigorous gas supply which also requires quick implementation, flexibility in the selection of energy sources avoiding unreliable ones, contained environmental and social impact, cost-effectiveness and compatibility with the energy transition goals. The FSRU solution meets these goals in a satisfactory manner and it is not an overstatement that FSRUs really deserve their present and probably future success in world's energy play.

LNG UNIT CONVERSION TABLE

- 1 million tonnes (LNG) = 48.7 Bcf* (gas) = 1.379 Bcm (gas)
- 1 Bcf (gas) = 45,000 cubic meters (LNG)
- 1 million tonnes per year (mtpa) (LNG) = 48.7 Bcf/year* (gas) = 1.379 Bcm/year (gas)
- 1 cubic meter (m³) = 35.315 Cubic feet (cf)
- 1 tonne (LNG) = 53.57 MMBtu**
- 1 kilocalorie (kcal) = 4.187 kilojoule (kJ) = 3.968 Btu
- 1 Dth (dekatherm) = 1 MMBtu = 10 therms = 1,000,000 Btu

* Assumes a specific gravity of LNG at 0.45

** Assumes a natural gas heating value of 1,100 Btu/cf

Hydrogen Underground Storage : Status of Technology and Perspectives

Author: Carlo Cappellani – Senior Geoscientist

1 Hydrogen Underground Storage : Status of Technology and Perspectives

Hydrogen will play a key role in the development and transformation of future renewable energy systems. H₂ has many

benefits, can be generated by well-established and emerging technologies and can be used in a variety of end-use energy and transport processes. H₂, as a fuel source, has long been identified as a critical step toward a low-carbon, and eventually zero-carbon, energy society. Hydrogen storage is an essential element of an integrated energy system and hydrogen economy. As hydrogen demand and production are growing, underground storage is emerging as a relevant, large-scale solution. While in recent years a lot of attention has mainly been on hydrogen supply and transmission infrastructure, there is the need for underground hydrogen storage to balance and ensure the resilience of a future energy system that relies significantly on renewable energy sources. Hydrogen can be physically underground stored using a method which has already proven its worth and Carbon Geo Sequestration (CGS) and natural gas are essential analogs for H₂ storage. Natural gas storage in underground facilities can be dated back to 1916 when it was stored in geological formations. According to many authors, Ontario gas field (Canada) is considered the first successful underground storage project (Taylor et al., 1986). However, certain operational differences (physical and chemical properties) unique to H₂ must be acknowledged for effective operation (Iglauer, 2017). Higher demand means there is going to be a need for increased storage capacity and the solution to this challenge is to utilize earth underground reservoirs. Underground reservoirs, such as salt caverns or porous rocks, offer giant capacities to store billions of cubic meters of hydrogen at high-pressures. Although the existence of few Underground Hydrogen Storage (UHS) sites, up till now, little is known about how hydrogen behaves in the subsurface and, current studies are investigating not only how it behaves in the subsurface but also what kind of environment – type of subsurface – would be the right reservoir to store it at a given quantity and scale. Also, to consider challenges of containing hydrogen tiny molecules inside the reservoirs, maintaining its purity, and operating the system within safe mechanical cyclic loading. Considering underground hydrogen

storage, an integrated multidisciplinary approach is required, combining several specialists and disciplines (e.g. fluid mechanics and rock mechanics, etc.). Also, integrating laboratory discoveries with numerical modelling will provide solutions to make this technology ready for field deployment within next year

To see more go to full text article



Natural Hydrogen: Promising opportunities for Exploration & Production

Author: Carlo Cappellani – Senior Geoscientist

1 Introduction

The global energy sector is transforming and hydrogen (the most energy-rich gas) is likely to play an increasingly prominent role as a clean energy carrier. Many countries have identified hydrogen as a key pathway to decarbonise their transport, industry processes, heating and energy storage sectors.

Hydrogen is almost exclusively manufactured for industrial use, with around 840 Bm³ per year being produced worldwide (Wood Mackenzie 2021).

It can be produced artificially via a variety of different pathways and the primary methods for production of hydrogen *with low carbon emissions* being

1. water electrolysis using renewable energy (green hydrogen)
2. steam reformation of natural gas paired with carbon capture and storage (CCS; blue hydrogen)
3. coal gasification combined with CCS (also blue hydrogen).

Note:

- *the majority of produced hydrogen originates from hydrocarbon-based feedstock without CCS (grey hydrogen) since the economics for the electrolytic production of green hydrogen (0.1% of total H₂ production) requires improvement (Wood Mackenzie 2021).*
- *For a large-scale hydrogen industry to develop, hydrogen storage is key and hydrogen storage in salt caverns is considered the most promising approach for large-scale seasonal storage (HyUnder 2013; Caglayan et al. 2020).*

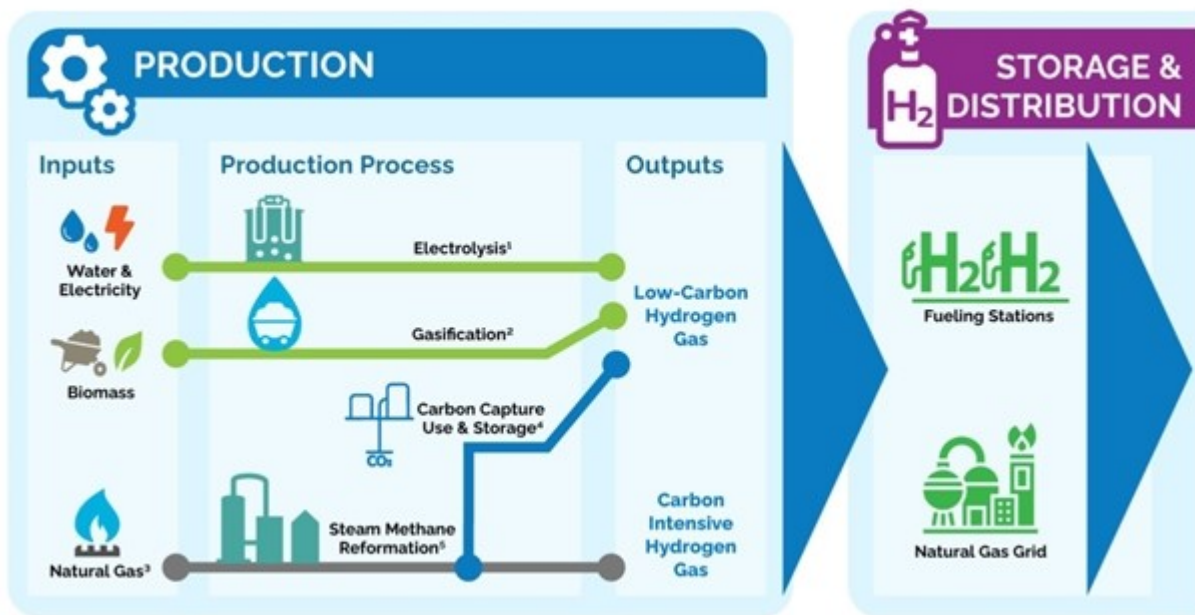


Figure 1 *Primary methods for hydrogen production*

To see more go to full text article



Big Data in Oil and Gas Industry

Author: Elviroso Brancaccio – Serintel Srl – Rome (Italy)

Introduction

Big Data or Big Data analytics refers to a new technology which can be employed to handle large datasets which include six main characteristics of volume, variety, velocity, veracity, value, and complexity.

With the recent advent of data recording sensors in exploration, drilling and production operations, oil and gas industry has become a massive data intensive industry.

Analyzing seismic and micro-seismic data, improving reservoir characterization and simulation, reducing drilling time and increasing drilling safety, optimization of the performance of production pumps, improved petrochemical asset management, improved shipping and transportation, and improved occupational safety are among some of the applications of Big Data in oil and gas industry.

In fact, there are ample opportunities for oil and gas companies to use Big Data to get more oil and gas out of hydrocarbon reservoirs, reduce capital and operational expenses, increase the speed and accuracy of investment decisions, and improve health and safety while mitigating environmental risks.



Figure 1 Big Data in Oil and Gas Exploration and Production

One of the key enablers of the data-science-driven technologies for the industry is its ability to convert Big Data into “smart” data. New technologies such as deep learning, cognitive computing, and augmented and virtual reality in general provide a set of tools and techniques to integrate various types of data, quantify uncertainties, identify hidden patterns, and extract useful information enormously reducing the data processing time. This information is used to predict future trends, foresee behaviors, and answer questions which are often difficult or even impossible to answer through conventional models.

To see more go to full text article



Low Motion Floating Production Storage Offloading (LM-FPSO): Evolution of Offloading Production Systems

*Authors: Marco Cocchi – Researcher – Campus Bio-medico
University of Rome*

*Leone Mazzeo – Researcher – Campus Bio-medico
University of Rome*

1

Introduction

Oil & Gas industries have moved in ***deeper, more remote and technically demanding regions*** in the last 30 years. With increasing technical complexity of the extraction facility, the fixed cost of the Oil & Gas upstream complex also increases, but in the persistent lower-for-longer price environment there is continuing pressure to develop these fields safely while reducing CAPEX and OPEX costs.

FPSO technology seems to be promising in offering a flexible solution to explore remote Oil fields while in maintaining competitive costs. Nonetheless, Semisubmersible units, SPAR platforms and tension-leg platforms (TLPs) are also common in deepwater regions. TLPs, in particular, find application in up to 1,500m-deep water wells, but FPSO has the advantage to offer the required onboard storage capacity and offloading capability without employing a separate storage vessel or infrastructure.

The ***high dynamic motion***, generated by the rough sea condition to which FPSO units are exposed when operating in remote sea areas, makes the ***Riser System*** design more challenging. In fact, it plays a fundamental rule in determining the feasibility of the extraction of hydrocarbons exploiting remote region resources. Thus, the development of a ***low-motion FPSO*** enables the utilization of conventional riser systems (such as *steel catenary risers* and *top-tensioned risers*). The use of conventional riser technologies, is also able to improve the life-cycle and reliability of a FPSO facility: the realization of a simple and effective installation (by the means of an additional facility structure) that is able to ***oppose*** to the high dynamic forces that rough sea environment

exerts on the floating structure, is a technological step change, needed to open up less accessible or economically cost-prohibitive fields.

To see more go to full text article



The Role of Natural Gas in the Energy Transition Phase

Authors: Marco Cocchi – Researcher – Campus Bio-medico University of Rome

Leone Mazzeo – Researcher – Campus Bio-medico University of Rome

1

Introduction

The rapid growth of the world population driven by the development of the industrial sector, have led to an increase of the anthropogenic greenhouse gas emissions. It has been detected an unprecedented, in at least the last 800,000 years, concentration of carbon dioxide (Figure 1-1) in the atmosphere. Such event, together with other anthropogenic drivers, have been related as the main cause of the phenomena

of the “global warming” observed since the mid-20th century.

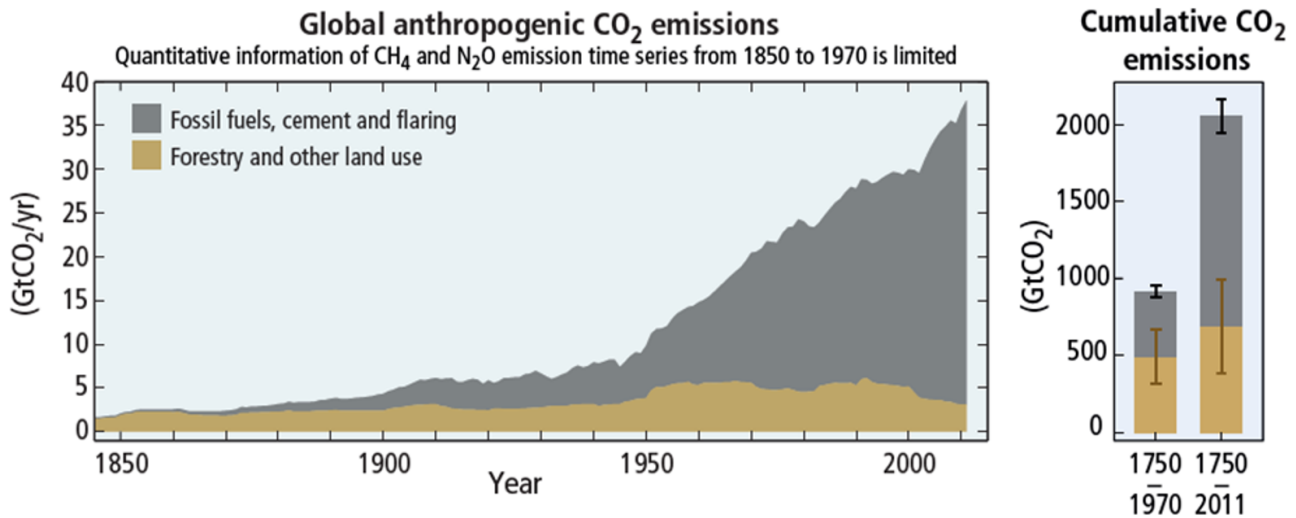


Figure 1-1 Global anthropogenic CO₂ emissions[\[1\]](#).

In order to face the issue raised from the considerations about CO₂ concentration, the first worldwide agreement on greenhouse gas emissions was signed in April 2016. The 196 countries responsible for 55% of total CO₂ emissions agreed, at the Conference of the Parties in November 2015, to commit to cap global warming at a maximum 1.5°C (referred to the global land-ocean mean surface temperature, GMST), a more challenging target than the 2°C cap originally proposed in the Paris World Climate Conference. Given this commitment, signatory countries need to review their energy strategies in order to reduce emissions by actively promoting low carbon economy policies[\[2\]](#).

Natural gas is a fossil gas mixture consisting mainly of methane (C1). The remainder is heavier hydrocarbons: ethane (C2), propane (C3), isobutane (iC4), n-butane (nC4), and small amounts of heavier components down to C7s. The typical values of the percentage of methane mole fraction in natural gas may vary from 87% up to 97%[\[3\]](#).

Among all the fossil primary energy sources, natural gas presents the highest hydrogen to carbon ration. This characteristic is of extreme importance since leads the following two main properties:

- The highest lower heating value expressed in MJ/kg respect to all the others fossil fuels. (As described in the picture below[\[4\]](#))
- The lowest mass of CO₂ produced per mass of combustible.

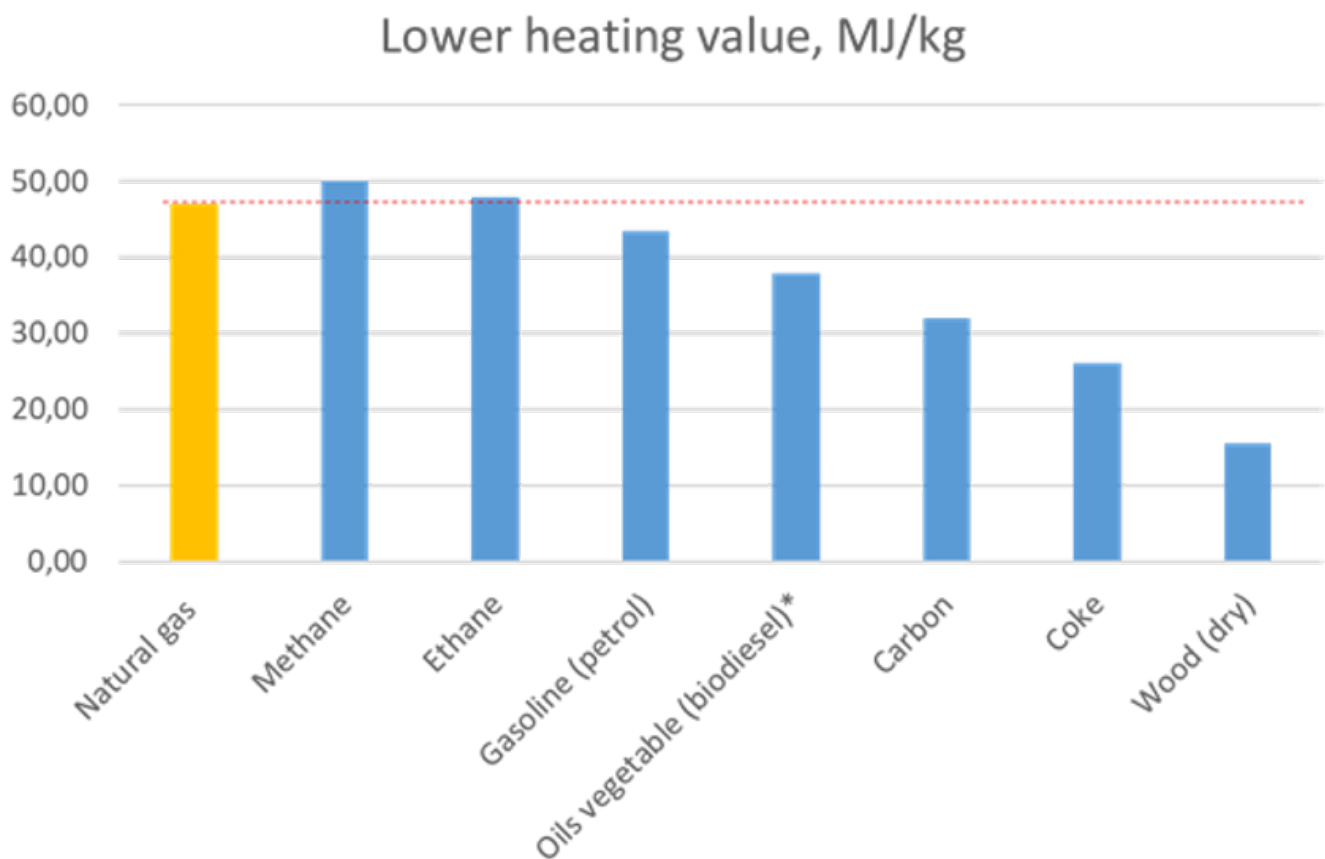


Figure 1-2 Lower heating value [MJ/kg] for different types of hydrocarbons[5].

According to the proprieties described above, natural gas plays a fundamental role in the fight against climate change. The substitution of high carbon content fossil fuels, such as coal, with natural gas, may represent the first step forward the decrease of CO₂ emissions.

The main sectors that will immediately benefit of replacing low hydrogen to carbon fuel with methane in terms of CO₂ emissions are:

- **Energy production.** All the thermo-electric energy plants belong to this sector. They may easily introduce methane as fuel in the burner for the production of high pressure steam. This strategy, adopted already by many companies, reduces CO₂ emissions saving operative costs on the post-combustion carbon capture unit.

- **Transportation.** On road transportation is already affected by the presence of vehicles fed by methane. In this case engines are designed to host such type of fuel and this constitutes a positive direction for the reduction of CO₂

It is clear that the substitution of “conventional” fuel with methane is just a temporary solution, a clever way to “take time” establishing a ***transition phase***, until the worldwide development of the zero-emission (renewable) energy sources will take place.

[\[1\]](#) “Climate Change 2014 Synthesis Report Summary Chapter for Policymakers,” 2014.

[\[2\]](#)

<https://safeonline.it/wp-content/uploads/2016/09/Articolo-Accettazione-2016.pdf>

[\[3\]](#)

<https://www.uniongas.com/about-us/about-natural-gas/Chemical-Composition-of-Natural-Gas>

[\[4\]](#)

https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html

[\[5\]](#)

https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html

To see more go to full text article



Innovation and New Technologies in the Upstream Oil & Gas Industry

Authors: Marco Cocchi – Researcher – Campus Bio-medico University of Rome

Leone Mazzeo – Researcher – Campus Bio-medico University of Rome

1 Introduction

Oil & Gas reservoir research and exploration requires the utilization and adaptation of a large number of different technologies spread over numerous engineering fields. Because of the intense resource involved in such operation, the *Exploration and Production* sector (E&P) results to be a power-demanding field and particular attention should be paid to make it smarter and more efficient.

In the research of technology updates, upstream, as well as downstream, Oil & Gas industry has always been seeking out external innovations even in the field of informatic technologies and robotics.

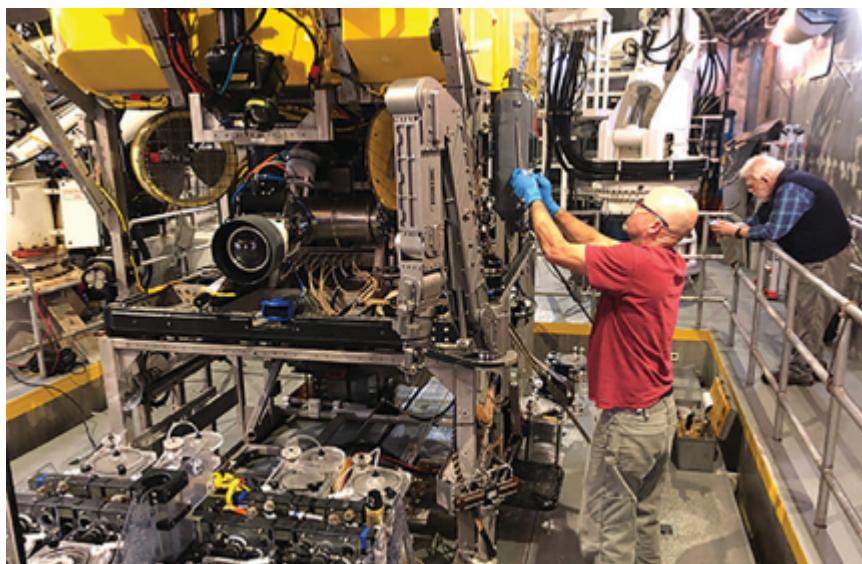


Figure 1: Work-class ROVs: the innovative remote-controlled robots for subsea operation[\[1\]](#)

In Figure 1 a *work-class ROV* (remote operated vehicle) for subsea exploration is reported during its assembly phase. *ROVs* are made from robotic arms, known as manipulators, a camera, for subsea environment visual analysis, electrical drivers for motion control and batteries or external cables for communication and power delivery. *ROVs* for exploration were introduced during the '70s and represented a significant technology update in their field: thanks to the fact that they can be designed to operate at very high pressure and low temperature conditions, with the respect to human operators, they allowed to discover a high number of new oil fields that previously were thought impossible to be investigated, increasing the opportunities for Oil & Gas companies. The introduction of *ROVs* also decreased the cost of the exploration operations and, on top of the economics aspect, they increased the safety by substituting and replacing human operators.

ROVs represent also an example of technology transfer from external sectors (in this case the military sector) to upstream Oil & Gas operations. Technologies that come into the Oil & Gas sector often enter into a prolific chain of

innovation and become refined commercialized. That was also the case for **ROVs**, that having been incorporated for years in the Upstream sector, found new application for scientific research in marine biology and they have been used over the years to search for famous shipwrecks and discover new marine species.

In the following paragraphs, some of the most important new technologies in the *E&P* sector will be presented and discussed.

[\[1\]](#)

Source:

["https://pubs.spe.org/en/jpt/jpt-article-detail/?art=5153"](https://pubs.spe.org/en/jpt/jpt-article-detail/?art=5153)

To see more go to full text article



Current Trends in Artificial Intelligence (AI) Application to Oil and Gas Industry

Authors: Marco Cocchi – Researcher – Campus Bio-medico University of Rome

Leone Mazzeo – Researcher – Campus Bio-medico University of Rome

1

Introduction

In recent years, artificial intelligence (AI), in its many integrated flavors from neural networks to genetic optimization to fuzzy logic, has made solid steps toward becoming more accepted in the mainstream of the oil and gas industry.

On the basis of recent developments in the field of Oil & Gas upstream, it is becoming clear that petroleum industry has realized the immense potential offered by intelligent systems. Moreover, with the advent of new sensors that are permanently placed in the wellbore, very large amounts of data that carry important and vital information are now available.

To make the most of these innovative hardware tools, an operator intervention is required to handle the software to process the data in real time. Intelligent systems are the only viable techniques capable of bringing real-time analysis and decision-making power to the new hardware.

An integrated, intelligent software tool must have several important attributes, such as the ability to integrate hard (statistical) and soft (intelligent) computing and to integrate several AI techniques. The most used techniques in the Oil and Gas sector are:

- **Genetic Algorithm (GA)**, inspired by the biological evolution of species in natural environment, consists of a stochastic algorithm in which three key parameters must be defined:
 1. Chromosomes, or better, vectors constituted by a fixed number of parameters (genes).
 2. A collection of chromosomes called genotype, which represents the individuals of a population.
 3. The operations of selection, mutation, and

crossover to produce a population from one generation (parents) to the next (offspring).

- **Fuzzy Logic (FL)** is a mathematical tool able to convert crisp (discrete) information as input and to predict the correspondent crisp output by means of a knowledge base (database) and a specific reasoning mechanism. To achieve such goal, the crisp information is firstly converted into a continuous (*fuzzy*) form, secondly processed by an inference engine and at least re-converted to a crisp form.
- **Artificial neural network (ANN)** is constituted by a large number simple processing units, characterized by a state of activation, which communicate between them by sending signals of different weight. The overall interaction of the units produces, together with an external input, a processed output. The latter is also responsible of changing the state of activation of the units themselves.

The techniques described above have been adopted in the Oil and Gas field since 1989. Relatively to O&G industry, Figure 1 shows the number of applications of AI.

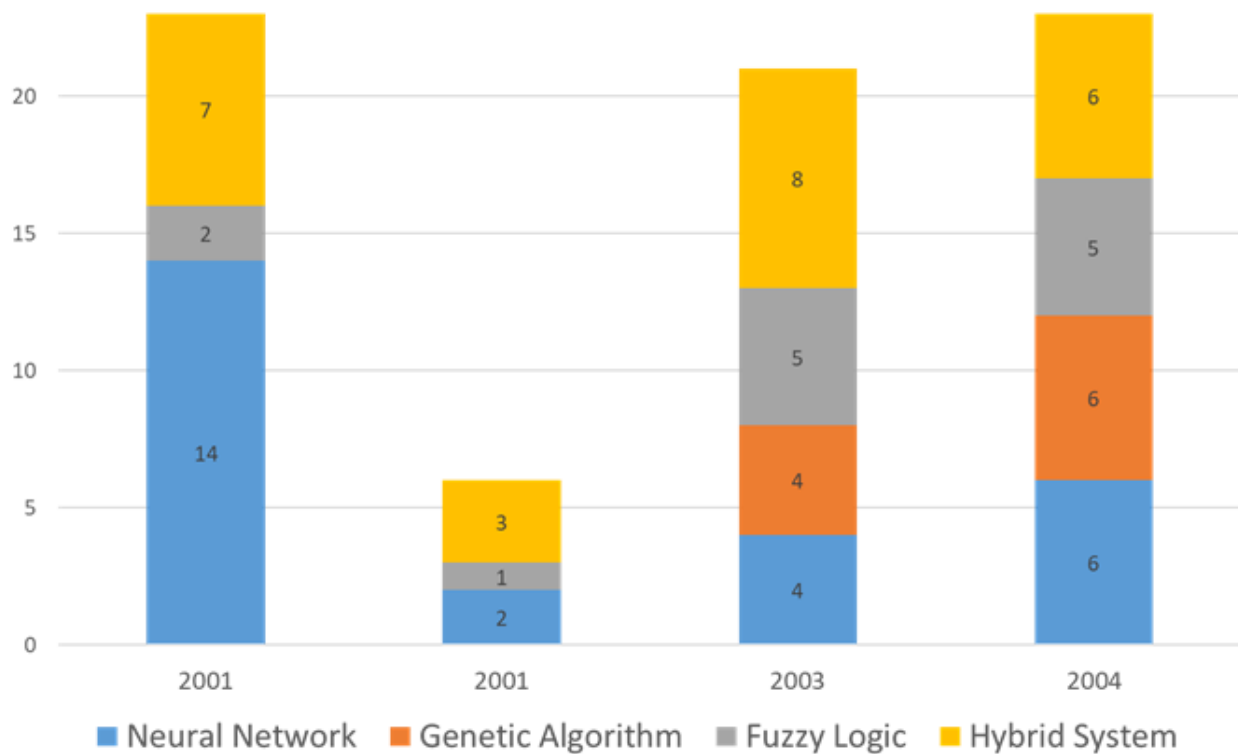


Figure 1 Artificial intelligence (AI) applications in the Oil and Gas industry during the years.

In the following sections some of the application of AI in the O&G sector will be analyzed with a particular focus on the *Drilling operation* (Exploration & Production).

To see more go to full text article



Petroleum Technologies and Sustainability in the Era of

Climate Change

Authors: Marco Cocchi – Researcher – Campus Bio-medico University of Rome

Leone Mazzeo – Researcher – Campus Bio-medico University of Rome

1 Introduction

The climate change is the biggest challenge that the human kind have ever had to deal with. Despite a residual skepticism on the topic, “climate change is real”[\[1\]](#) and it is already influencing and it will influence the life on Earth.

The cause of climate change is attributed to the significant increase of greenhouse gases (mainly CO₂) in the atmosphere, able to trap heat radiating from Earth toward space. By means of the analysis of ice cores[\[2\]](#) it has been discovered that, for millennia, the concentration of carbon dioxide in atmosphere has been below 300 ppm. As it is shown in the Figure 1, such threshold was broken in 1950 and, since then, the concentration of CO₂ has never stop growing reaching in 2019 the value of 410 ppm[\[3\]](#).

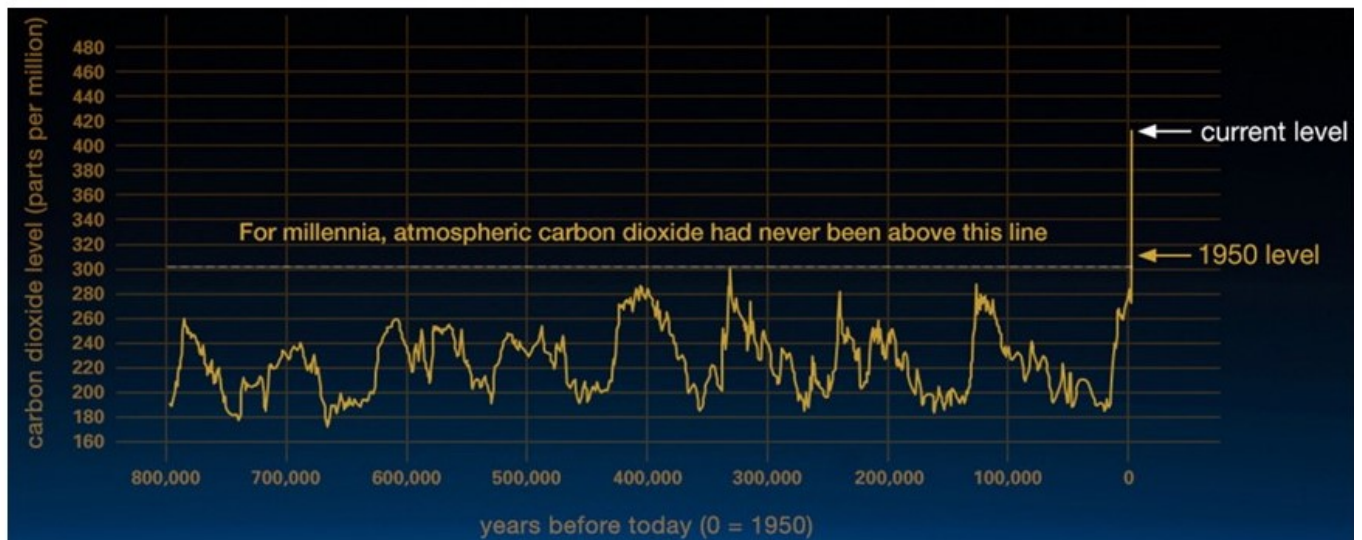


Figure 1 Variation of carbon dioxide concentration during millennia estimated from atmospheric samples collected from ice cores³.

According on the considerations mentioned above, the 21st century is indeed recognized as the “*era of climate change*” mainly characterized by the increase of the land-ocean mean surface temperature (GMST) and, as a consequence, by other environmental phenomena such as the increase of the average sea level and the retreat of glaciers.

The reason why the amount of GHGs in the atmosphere is increasing so rapidly is strictly connected to the growth of the world population driven by the development of the industrial sector. Since the mid-20th century the anthropogenic CO₂ emissions have raised exponentially (see Figure 2) in line with the trend detected of the carbon dioxide concentration in atmosphere. On top of this, the human action is identified as the main cause of the global warming.

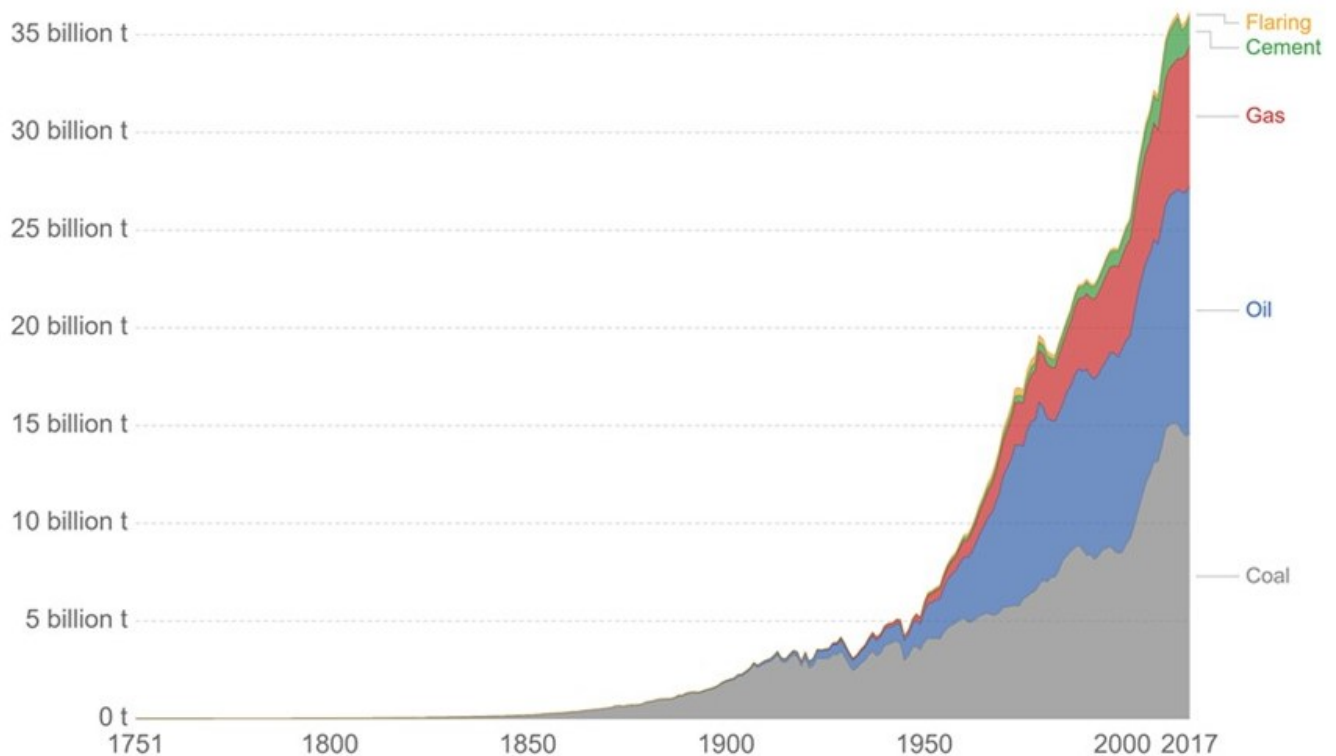


Figure 2 Global anthropogenic CO₂ emissions[\[4\]](#).

The sign of the Paris Agreement (Paris climate conference – COP21, December 2015), the first-ever universal, legally binding global climate change agreement, represents an important act to the fight against the climate changes. Major players of the Oil & Gas and Energy sector are financing the development of sustainable technologies in order to diminish their significant carbon footprint. The actions of mitigation of the emissions of carbon dioxide are mainly directed to the main sources of CO₂ which, as shown in the Figure 3, comes from the combustion of *coal, oil and gas*, and from the operations of *flaring and cement production*[\[5\]](#).

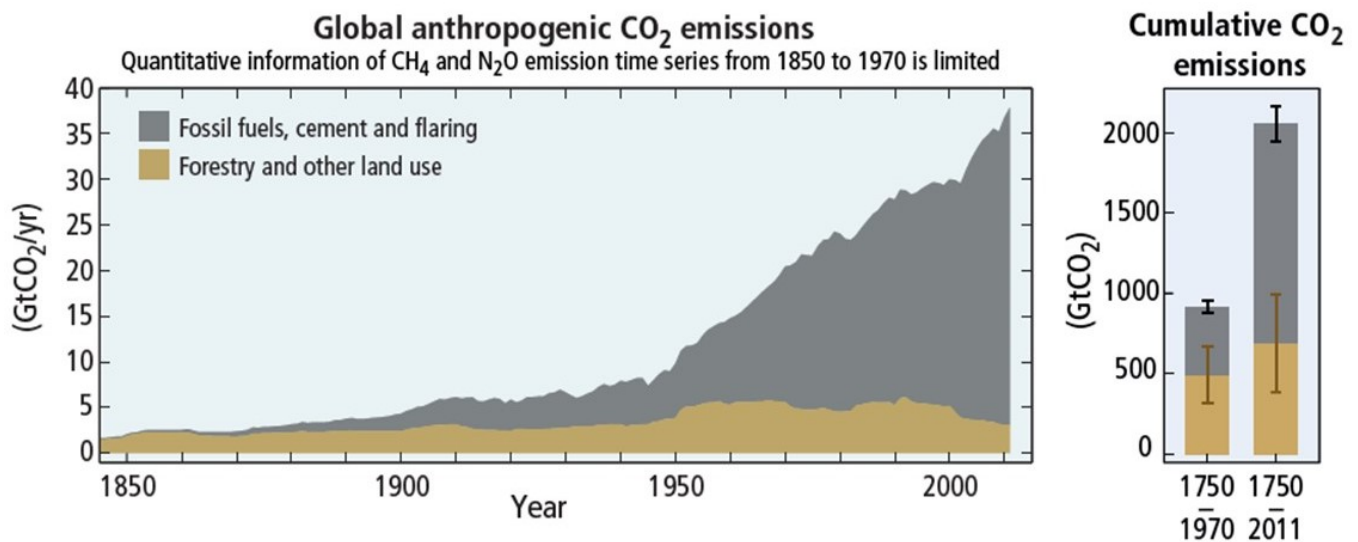


Figure 3 CO₂ emissions by fuel type, [5].

[1]

https://sites.nationalacademies.org/cs/groups/international/site/documents/webpage/international_080877.pdf

[2]

To find more: <https://icecores.org/about-ice-cores>

[3]

<https://climate.nasa.gov/>

[4]

"Climate Change 2014 Synthesis Report Summary Chapter for Policymakers," 2014.

[5]

<https://ourworldindata.org/co2-and-other-greenhouse-gas-emissions>

To see more go to full text article



Emergency Sea Protection: New Technologies During Oil Spill

Authors: Marco Cocchi – Researcher – Campus Bio-medico University of Rome

Leone Mazzeo – Researcher – Campus Bio-medico University of Rome

1 Introduction

Every day, hundreds, if not thousands, of oil spills are likely to occur worldwide in many different types of environments, on land, at sea, and in inland freshwater systems.

The spills are coming from the various parts of the oil industry, mainly during:

- Oil exploration and production activities.
- Oil transportation in tank ships, pipelines, and railroad tank cars.

The sea environment is particularly subjected to oil pollution. It is estimated that approximately 706 million gallons of waste oil enter the ocean every year^[1]. According to the data of oil spills in the United States published by the Environmental Research Consulting (ERC), large spills (over 30 tons), which the 0,1% are incidents, represent the 60% of the total amount of oil spilled. Despite the latter information, 72% of spills are of smaller amount (0.003 to 0.03 ton or less) as shown in (Figure 1-1).

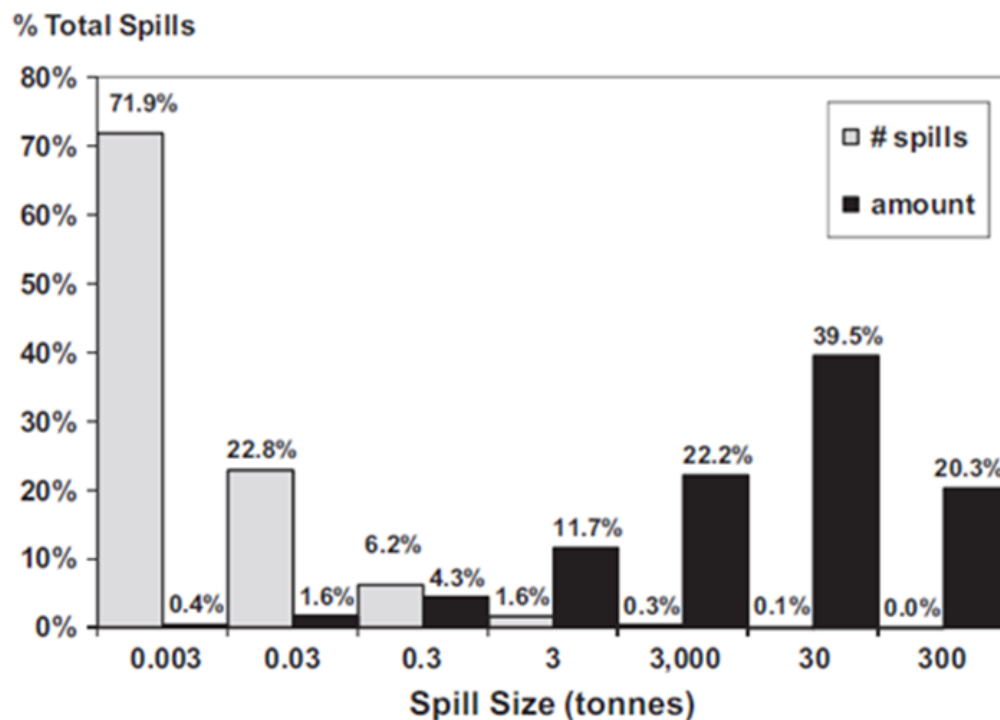


Figure 1-1 Size classes of U.S. marine oil spills, 1990 e 1999 (ERC data) ^[2] [...](#)

Naturally, the relatively rare large spill incidents get the most public attention owing to their greater impact and visibility, for this reason it is impossible to measure the entity of damage only considering the size of spillage. Location and oil type are extremely important. Significant efforts have been made to study oil spills after the Exxon Valdez spillage of 1989 (Figure 1-3). However, such knowledge has not kept pace with the growth of oil and gas development [\[3\]](#). In 2010, in the Gulf of Mexico, took place the Deepwater Horizon oil spill (Figure 1-3) considered one of the most catastrophic environmental disasters in human history. In such occasion, over 4.9 million barrels of crude oil were released involving 180,000 km² of ocean [\[4\]](#).

Timely and highly efficient responses can lead to more hopeful outcomes with less overall damage to the environment. The most

used clean response devices and techniques[\[5\]](#) are (Figure 1-2):

- **Manual recovery**, mainly used for costal oil cleanup, involves a team of workers/volunteers using tools like rakes and shovels to collect the oil into buckets and drums for transfer it to a processing station.
- **Booms**, mechanical barriers that protect natural resources from spreading crude oil. They are very useful to confine the oil spill facilitating the cleaning operations.
- **Skimmers**, mechanical devices designed to remove oil from the water surface without causing changes to its physical or chemical properties and transfer it to storage tanks. Skimmers are usually used together with booms.
- **Sorbents**, materials that can soak up oil from the water by either absorption or adsorption.
- **In situ burning**. It is a cleaning technique which consists in a controlled burning of the oil that takes place at, or near, the spill site.
- **Dispersants** are chemical spill treating agents, similar to emulsifiers, that accelerate the breakdown of oil into small droplets that “disperse” throughout the water. Dispersants are used to reduce the impact to the shoreline and to promote biodegradation of oil.
- **Bioremediation**. It consists of the introduction of a microbial population (bio-augmentation) together with nutrients (bio-stimulation), to enhance the rate of oil biological degradation.

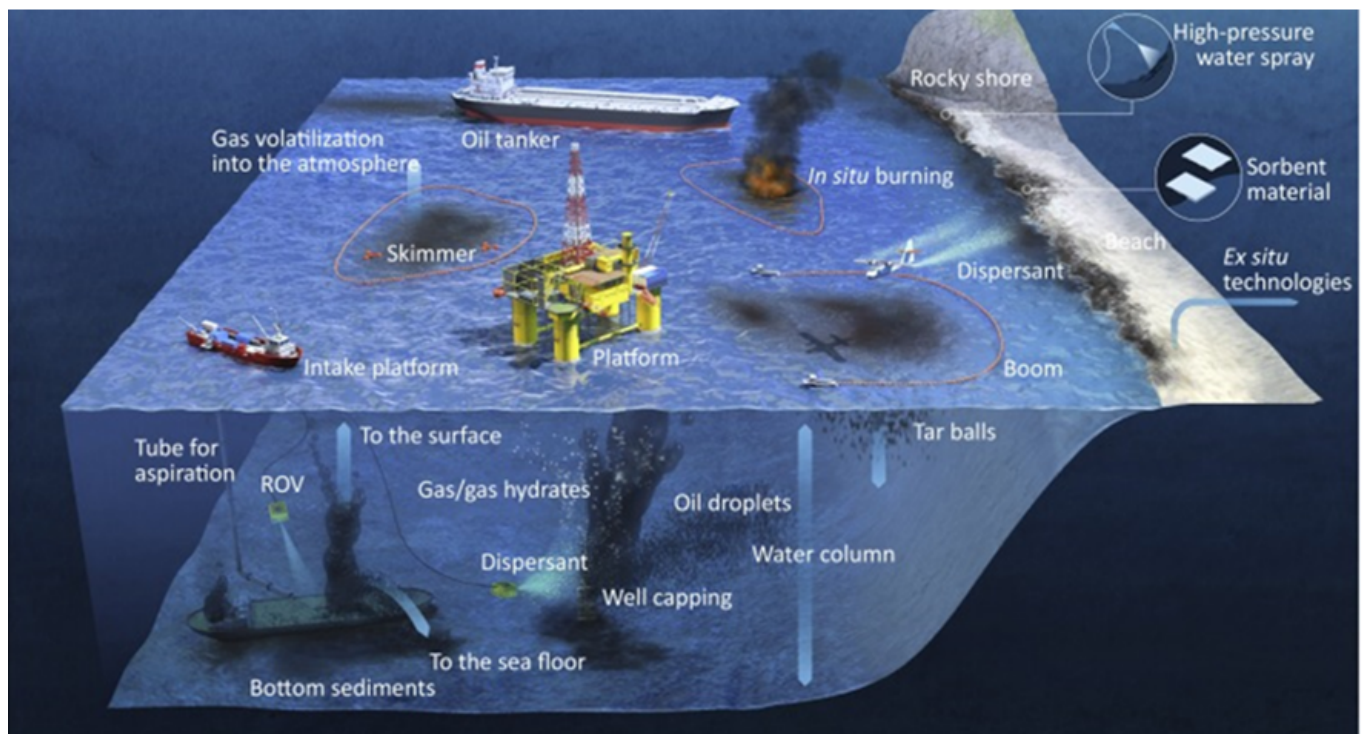


Figure 1-2 A visual overview of all the oil spill response techniques^[6].

The detection and monitoring of oil spillage are of fundamental importance to perform a rapid response. Innovations on sea protection involve, in fact, both oil spill monitoring and response techniques.



Figure 1-3 BP Deepwater Horizon blowout 2010 (left), Exxon Valdez spillage (right)^{[7][8]}.

<http://www.waterencyclopedia.com/Oc-Po/Oil-Spills-Impact-on-the-Ocean.html>

[2] D. Schmidt-etkin, *Spill Occurrences: A World Overview*. D.S. Etkin, 2011.

[3] Li, P., Cai, Q., Lin, W., Chen, B., & Zhang, B. (2016). Offshore oil spill response practices and emerging challenges. *Marine Pollution Bulletin*, 110, 6–27.

[4] Griggs, J. W. (2011). BP Gulf of Mexico oil spill. *Energy Law Journal*, 32, 57.

[5] B. Chen, X. Ye, B. Zhang, L. Jing, and K. Lee, *Marine Oil Spills – Preparedness and Countermeasures*, Second Edition. Elsevier Ltd., 2019.

[6] F. Mapelli et al., “Biotechnologies for Marine Oil Spill Cleanup: Indissoluble Ties with Microorganisms,” *Trends Biotechnol.*, vol. xx, pp. 1–11, 2017.

[7]

<https://www.hakaimagazine.com/news/wounded-wilderness-the-exxon-valdez-oil-spill-30-years-later/>

[8]

https://it.wikipedia.org/wiki/Disastro_ambientale_della_piattaforma_petrolifera_Deepwater_Horizon

To see more go to full text article

